


# HotCase 500

Top and bottom case sealer for end of the line packaging

## Advantages of Case Sealing with hotmelts :

- 
- Improved packaging security (tamper evidence)
  - Possible cost savings versus tape spend
  - Corrugate reduction
  - Clean, tape-free surface to promote the brand
  - Improved case stability and palletizing
  - Long term bonds - for long term storage and shipping
  - High productivity
  - Reduction in product damages - no knife used for opening of cases
  - Sustainability improvement hot melts versus tape
- 

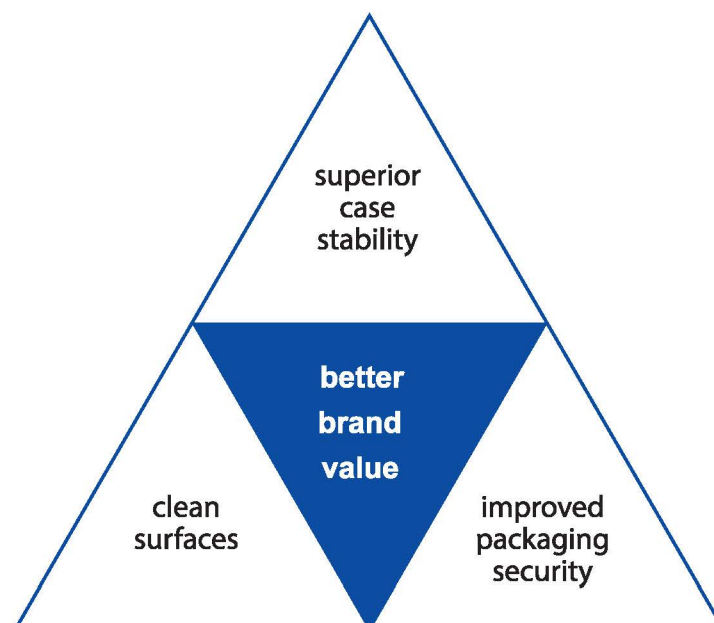



## Welbound HotCase 500

- Top and bottom case sealing with hotmelts
- Single operator for the line; simple to operate
- Nordson® hotmelt dispensing unit
- Speeds up to 20 cases per minute
- Interlocking safety shields
- Optional feed-in conveyor

### Technical Data

Max length	500 mm	Mechanical speed	20 cases/min.
Min length	150 mm	Electric supply	415 V, 3 phase, 50 Hz
Max width	500 mm	Power consumption	4 KW
Min width	180 mm	Air pressure	5 - 6 bar
Max height	500 mm	Air consumption	0.35 L/case
Min height	150 mm	Machine dimensions	3035mm(L)x920mm(W)x2025mm(H)
Conveyor height	480 - 650 mm		



112, East West Industrial Centre, Safed Pool, Kurla-Andheri Road, Sakinaka,  
Mumbai – 400072. INDIA. Tel: +91 (22) 28596960 / 28597919 Fax: +91 (22) 28564852

email: [welbound@gmail.com](mailto:welbound@gmail.com) | website: [www.welbound.com](http://www.welbound.com)